

GROWONIX

TUNED FOR GROWING



UV-1530 / UV-6010 UV-LB / UV-XL OWNERS MANUAL

WWW.GROWONIX.COM



Built in the U.S.A.

UV-1530 COMPONENT DIAGRAM


READ ENTIRE MANUAL THOROUGHLY
BEFORE INSTALLING THIS ULTRA-VIOLET LIGHT UNIT



UV-1530 SETUP INSTRUCTIONS

- First remove lamp from packaging. Try not to touch the bulb with your hands. The oils may cause hot spots on the bulb and early failure.
- Bulbs should be replaced yearly.

1

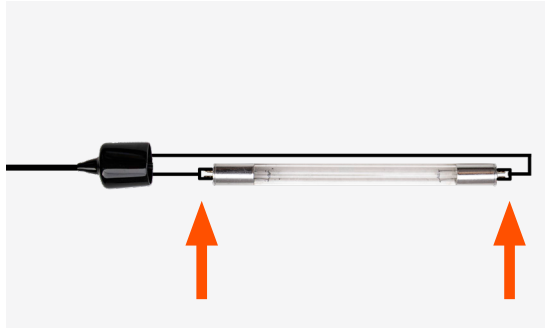


Attach the electrical connections to both ends of the bulb. Make sure bulb is clean of grease and oil.

2



Make sure housing collar is firmly tightened. Do not over tighten as this will cause glass inner sleeve to break.

3

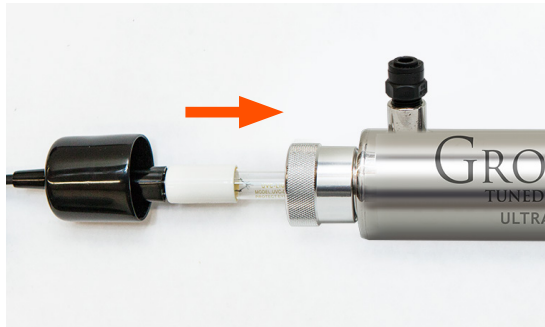

Insert bulb and wiring into sleeve.

4



Seat rubber boot over the collar.

5



Insert stem elbow fittings. Make sure they are completely seated.

6



Mount UV with supplied clips to the RO filter.

**CONNECT WATER LINES, START THE SYSTEM AND CHECK FOR LEAKS.
IF NO LEAKS EXIST, PLUG IN THE UV FILTER AND ENJOY!**

UV-6010/UV-LB/UV-XL/UV-12 COMPONENT DIAGRAM

READ ENTIRE MANUAL THOROUGHLY
BEFORE INSTALLING THIS ULTRA-VIOLET LIGHT UNIT



1. Housing
2. Ultraviolet Bulb
3. Quartz Sleeve
4. Power Transformer
5. Electrical Connection / Rubber Boot
6. Stem Elbow Fittings
7. Mounting Clips

UV-6010/UV-LB/UV-XL/UV-12 SETUP INSTRUCTIONS

- First remove lamp from packaging. Try not to touch the bulb with your hands. The oils may cause hot spots on the bulb and early failure.
- Bulbs should be replaced yearly.

1




Attach the electrical connections to the end of the bulb. Make sure bulb is clean of grease and oil.

2



Make sure housing collar is firmly tightened. Do not over tighten as this will cause glass inner sleeve to break.

3

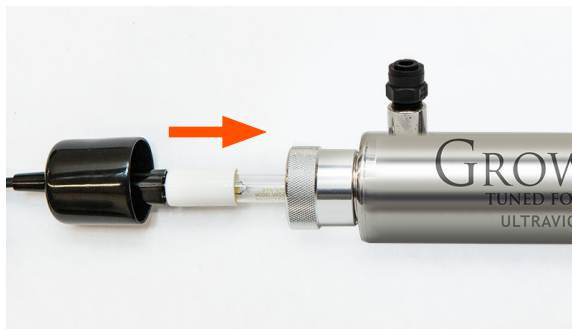

Insert bulb and wiring into sleeve.

4



Seat rubber boot over the collar.

5



Insert stem elbow fittings. Make sure they are completely seated.

6




Mount UV with supplied clips to the RO filter.

**CONNECT WATER LINES, START THE SYSTEM AND CHECK FOR LEAKS.
IF NO LEAKS EXIST, PLUG IN THE UV FILTER AND ENJOY!**

AREAS OF APPLICATIONS

<ul style="list-style-type: none"> • RO Water System • De-ionization • Rinse Water 	<ul style="list-style-type: none"> • Hot/Cold Water Dispenser • Coffee Machine • Wash Water 	<ul style="list-style-type: none"> • Water purification System • Potable Water • Bottle Water
---	--	--

ELECTROMAGNETIC WAVE DRAWING

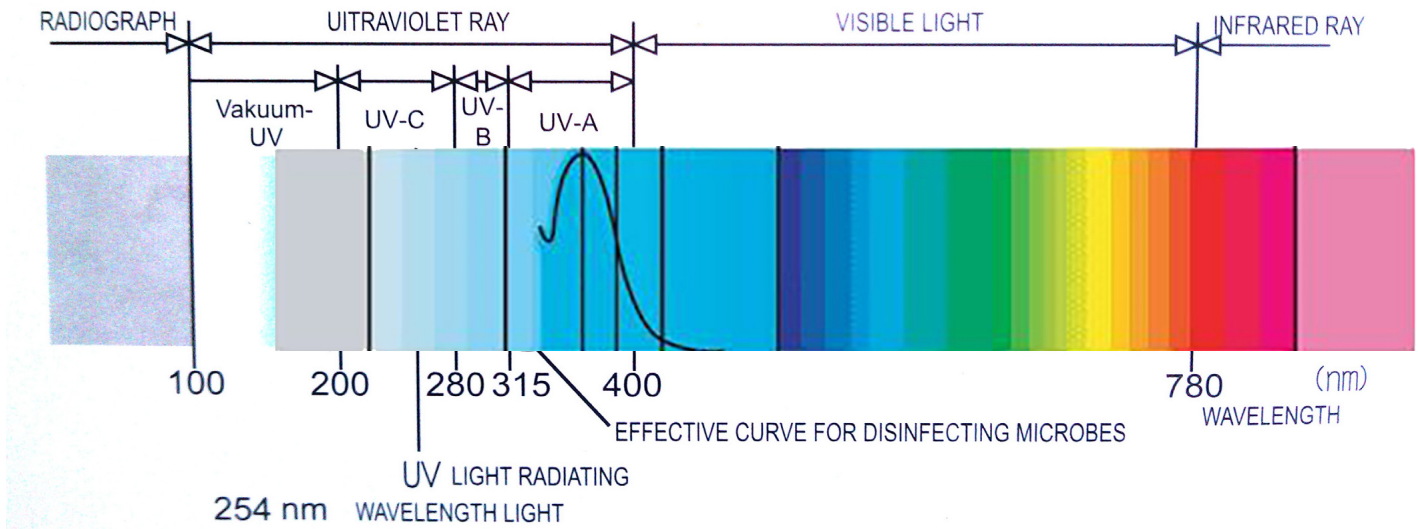

NOTICES:

- When the GX UV is installed and running, the first 280cc of water will be warmer than normal. When the system to which the UV is connected is not in use, the water will warm up after 25 minutes. You may flush the GX System filter before use to remove the warmer water.
- Do not look directly at the ultraviolet rays emitting from the UV lamp or it may cause eye damage.
- Unplug the UV electrical cord before servicing and/or cleaning the UV lamp or housing.

MODEL SPECIFICATIONS

PART #	IN / OUT	VOLTAGE	BALLAST	FLOW RATE	MAXIMUM OPERATING PRESSURE	LAMP LIFE	AUDIBLE LAMP ALARM
UV-1530	1/4" NPT	110V~120V / 60HZ 220V~240V (special order)	6W	1 GPM	85psi	5,000 hrs.	No
UV-6010	1/4" NPT	110V~120V / 60HZ 220V~240V (special order)	14W	2 GPM	125psi	9,000 hrs.	yes
UV-LB	1/2" NPT	110V~120V / 60HZ 220V~240V (special order)	24W	4 GPM	125psi	9,000 hrs.	yes
UV-XL	1/2" NPT	110V~120V / 60HZ 220V~240V (special order)	32W	6 GPM	125psi	9,000 hrs.	yes
UV-12	3/4" MNPT	110V~120V / 60HZ 220V~240V (special order)	39W	12 GPM	125psi	9,000 hrs.	yes

GROWONIX SYSTEM WARRANTY

For a period of one year from the date of original purchase, we will replace or repair any part of the GrowoniX reverse osmosis water system that we find to be defective in operation due to faulty materials or workmanship with the EXception of the replaceable filters and membranes.

GENERAL CONDITIONS

Damage to any part of this reverse osmosis system because of misuse; misapplication; negligence; alteration; accident; installation; or operation contrary to our instructions, incompatibility with accessories not installed by GrowoniX, or damage caused by freezing, flood, fire, or Act of God, is not covered by this warranty. In all such cases, regular charges will apply. This limited warranty does not include service to diagnose a claimed malfunction in this unit. This warranty is void if the claimer is not the original purchaser of the unit or if the unit is not operated under normal municipal water or well water conditions.

GrowoniX assumes no liability in connection with this reverse osmosis system. GrowoniX assumes no liability for any damages incurred through the use of this product. It is the responsibility of the end user to gauge the safe use of this product in the environment where it is applied. We do not authorize any person or representative to assume for us any other obligations on the sale of this reverse osmosis system. The information given out in the manual we believe to be true, but are offered to you in good faith without guarantee because each application of this product is different and beyond our control.

THE FOLLOWING STANDARD OPERATING CONDITIONS FOR RESIDENTIAL/COMMERCIAL REVERSE OSMOSIS SYSTEMS MUST BE MET FOR WARRANTY TO BE VALID.

	Water Pressure	pH Range	Maximum TDS	Water Temp
Standard System	40-80 psi	2-11	2000 ppm	40-100 F

GROWONIX RETURN POLICY

MERCHANDISE RETURN DETAILS AND PROCEDURE:

If any merchandise was defective —we will refund the full purchase price upon receiving and reviewing the merchandise returned in undamaged condition.

RMA NUMBER:

You must first obtain a Return Merchandise Authorization (RMA) number from GrowoniX.com. Any products sent to GrowoniX without an RMA number will not receive a refund and may be returned to the sender at their expense.

All refund amounts will be based on the manufacturer's warranty and GrowoniX return policy. Refunds will be issued back using the payment method you used when you placed your order. Refunds take up to 3-5 business days to process once we receive the return.

PACKAGING:

Please kindly re-pack the product in its original box, or a box of equivalent strength. The unit should be packed in the same manner as it came to prevent damage in shipping. Please return everything that was in the original box, including any free items if applicable. Be sure to drain out all water from wet systems and parts and wrap them in plastic bags before packing.

RETURN TO:

We will provide you with an GrowoniX warehouse address for return merchandise when we issue the RMA number.

GROWONIX

TUNED FOR GROWING



UV-1530 / UV-6010 UV-LB / UV-XL OWNERS MANUAL

WWW.GROWONIX.COM



Built in the U.S.A.