

GROWONIX

TUNED FOR GROWING



BP-6010
BP-6010-CH
ESOK
BOOSTER PUMP
OWNERS MANUAL

WWW.GROWONIX.COM

GROWONIX
TUNED FOR GROWING



1:1



WHY USE A GROWONIX BP6010 ?

Membranes love pressure! In general, more pressure allows for better emembrane rejection, longer membrane life, and increased membrane flow rate. GrowoniX BP-6010 Series Booster Pumps allow for the full potential performance of the RO membrane to be acheived—with only 35 PSI of incoming water pressure. The perfect solution for those with low feed water pressures, and those who want to receive the maximum performance from their GrowoniX water filter.

- BP-6010 SYSTEMS FEATURES**
- Continuous duty cycle
- Adjustable output pressure
- Controllable manually or with ESOK (electric shutoff kit)
- Patented electrogalvanized bracket on BP-6010-CH

BP-6010-CH


DOUBLES pure water production for the GX600 and GX1000 water filters. Splash Guard™ chassis connects directly to the GX600/GX1000. The pump only needs 30psi of incoming water pressure to produce the full flow rate! Low pressure cutoff to safeguard the pump against a loss of incoming water pressure. Stainless steel liquid filled 300 psi system pressure gauge. Can be controlled manually or with our electric shutoff kit.



BP-6010-CH

BP-6010

DOUBLES pure water production for the GX600, GX1000, EX600, EX1000 water filters. The pump only needs 30psi of incoming water pressure to produce the full flow rate! Low pressure cutoff to safeguard the pump against a loss of incoming water pressure. Stainless steel liquid filled 300 psi system pressure gauge. Can be controlled manually or with our electric shutoff kit.

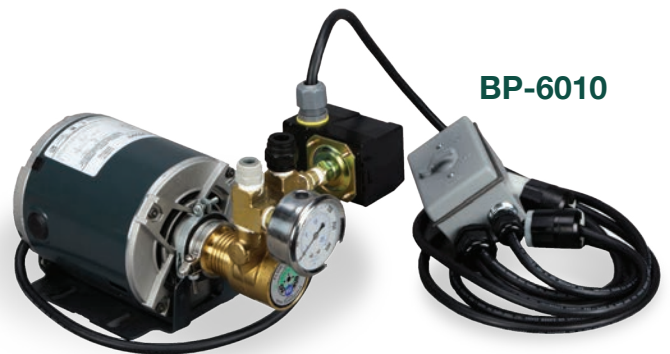

BP-6010

ELECTRIC SHUT OFF KIT

An essential add-on to almost any water filter! Shuts down feed water before the water filter. Controls on/off cycling of high pressure booster pumps. The electric shutoff kit consists of a float switch and solenoid valve.



ELECTRIC SHUT OFF KIT

SAFETY

READ ENTIRE MANUAL THOROUGHLY BEFORE INSTALLING THIS HIGH PRESSURE-BOOSTING PUMP.

The Safety section of this User's Manual outlines the various safety headings used throughout and this manual's text and are enhanced and defined below:

NOTE:

INDICATES STATEMENTS THAT PROVIDE FURTHER INFORMATION & CLARIFICATION

CAUTION:

INDICATES STATEMENTS THAT ARE USED TO IDENTIFY CONDITIONS OR PRACTICES THAT COULD RESULT IN EQUIPMENT OR OTHER PROPERTY DAMAGE.

WARNING:

INDICATES STATEMENTS THAT ARE USED TO IDENTIFY CONDITIONS OR PRACTICES THAT COULD RESULT IN INJURY OR LOSS OF LIFE. FAILURE TO FOLLOW WARNINGS COULD RESULT IN SERIOUS INJURY OR EVEN DEATH.

PLUMBING

The membranes and high pressure pumps used on all GrowoniX water filters 600GPD and greater (EX600, EX1000, GX600, GX1000) require a continuous flow of water with a minimum feed pressure of 35psi, and which does not exceed 105°F.

The plumbing for the feed line for the RO is 3/4" MHT for quick setup and convenience. If the water filter is to be installed in a permanent place, it is recommended to remove the garden hose fittings and plumb with 3/4" SCH80 piping certified for drinking water.

The tubing for the waste line is 3/8" and should be run to an open drain in a free and unrestricted manner (no back pressure)

The tubing used for the permeate line is 3/8" and can be run to the holding tank or directly to the point-of-use application with PVS fittings, or other FDA approved materials. This is so the material being used does not dissolve into the permeate water. Be certain that all of the components of the feed water are soluble at the concentrations attained in the system.

CAUTION:

ANY RESTRICTIONS OR BLOCKAGE IN THE DRAIN LINE CAN CAUSE BACK PRESSURE, WHICH WILL INCREASE THE SYSTEMS OPERATING PRESSURE. THIS CAN RESULT IN DAMAGE TO THE SYSTEM'S MEMBRANES AND COMPONENTS.

ELECTRICAL

The motor is a carbonator motor. It is available in 110/220 and 50/60 hertz 1 phase. Please ensure that the electrical circuit supplying the system is compatible with the requirements of the BP-6010 Series Delivery Pump. Each BP-6010 Series Delivery Pump is equipped with an 8" electrical cord.

NOTE:

WE RECOMMEND THAT A LICENSED ELECTRICIAN WIRE YOUR SYSTEM IN ACCORDANCE WITH LOCAL AND NATIONAL ELECTRICAL CODES (NEC).

WARNING:

TO REDUCE THE RISK OF ELECTRICAL SHOCK, THE INCOMING POWER SUPPLY MUST INCLUDE A PROTECTIVE EARTH GROUND.

PUMP

The pump is a low-lead brass rotary vane pump.

This pump is also available in stainless steel.

Follow these guidelines to ensure proper operation of the pump:

- The pump must NEVER be run dry. Operating the pump without sufficient feed water will damage the pump.
- ALWAYS feed the pump filtered water. The pump is susceptible to damage from sediment and debris.
- If any damage occurs to your system's pump, a re-build kit may be available. Contact your local dealer or distributor and inform them of your system's model and pump size.


WATER PUMP PRESSURE SWITCH

The low pressure switch shuts off the system when the feed water pressure drops too low for the system to function properly. This prevents damage to the pump. The system restarts automatically when the pressure is restored. If you notice the pressure fluctuating, and the system cycling off and on repeatedly, turn the system off and ensure that proper feed flow and pressure are available to the system.

WATER PUMP PRESSURE SWITCH ADJUSTMENT



The water pump pressure switch is adjusted at the factory to cut out when incoming pressure falls below 10 psi, and cut in when incoming pressure reaches 25 psi. Pressure switch should not need adjustment.

If for some reason pressure switch should fall out of adjustment, follow instructions below.

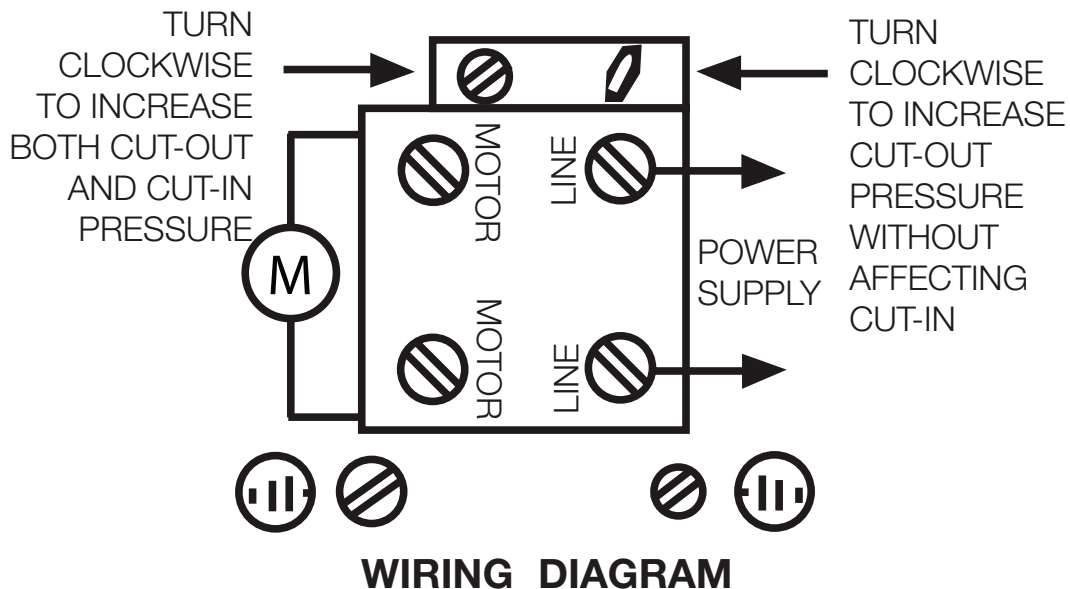

SPECIFICATIONS

WATER PUMP PRESSURE SWITCH

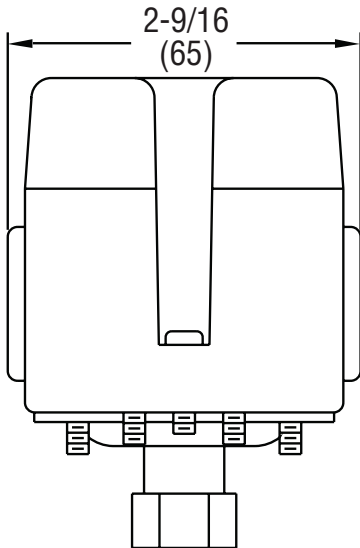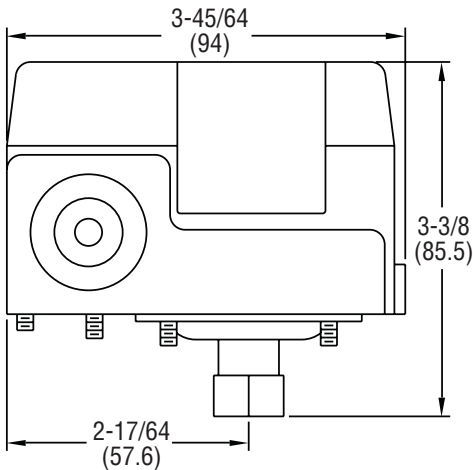

CAUTION: No lubrication or periodic servicing is required. Mount the control securely. Never exceed the electrical rating for the switch. Use the control only with compatible medias.

SPECIFICATIONS

Service: Compatible liquids and gases.

Wetted Materials: Silicone, steel, and SS.

Temperature Limits: 140°F (60°C).

Pressure Limits: See model chart.

Enclosure Rating: General purpose.

Repeatability: ±5 psig (±0.3 bar).

Switch Type: SPST snap action (see model chart).

Electrical Ratings: 20A @ 120 VAC, 12A @ 240 VAC, 9.6A @ 240 VAC (3 phase), 8.6A @ 32 VDC, 3.1A @ 120 VDC, 1.6A @ 240 VDC.

Electrical Connections: Screw terminal.

Conduit Connection: 7/8" hole for 1/2" conduit hub (2 places).

Process Connection: 1/4" female NPT.

Mounting Orientation: Switch can be installed in any position.

Setpoint Adjustment: Internal screws.

Weight: 0.75 lb (0.34 kg).

Deadband: See model chart.

Agency Approvals: CE, UL pending

MAINTENANCE

Upon final installation of the water pump pressure switch, no routine maintenance is required.

A periodic check of the system calibration is recommended. The pressure switch is not field serviceable and should be returned if repair is needed (field repair should not be attempted and may void warranty).

Be sure to include a brief description of the problem plus any relevant application notes.

Contact customer service to receive a return good authorization number before shipping.

TABLE OF CONTENTS

- 2 INTRODUCTION**
- 3 PRODUCTS**
- 4 SAFETY | PLUMBING | ELECTRICAL**
- 5 PUMP | WATER PUMP PRESSURE SWITCH**
- 6 SPECIFICATIONS | MAINTENANCE**
- 7 TABLE OF CONTENTS**
- 8 INTRODUCTION**
- 9 INFORMATION ON QUICK CONNECT FITTINGS**
- 10 BP6010 DELIVERY PUMP COMPONENT DIAGRAM**
- 11 BP6010 CH DELIVERY PUMP COMPONENT DIAGRAM**
- 12 SETUP INSTRUCTIONS FOR EX**
- 14 SETUP INSTRUCTIONS FOR GX**
- 16 PUMP TUNING**
- 18 ELECTRIC SHUTOFF KIT CONNECTION**
- 20 XXXXXX**
- 21 IN-TANK FLOAT SWITCH INSTALLATION**
- 21 SOLENOID MANUAL OVERRIDE**
- 22 WARRANTY**
- 23 REPLACEMENT PARTS**
- 24 ACCESORIES**

GROWONIX 
TUNED FOR GROWING




INFORMATION ON QUICK CONNECT FITTINGS

GROWONIX WATER FILTERS USE QUICK CONNECT FITTINGS THAT ALLOW FOR EASY MAINTENANCE.


MAKE A CLEAN TUBE CUT

Cut the tube squarely and if using plastic tubing, ensure that the cut has not made the tube out of round. Also ensure that the tube has a smooth outside diameter without any burrs or score marks prior to inserting it into the fitting.

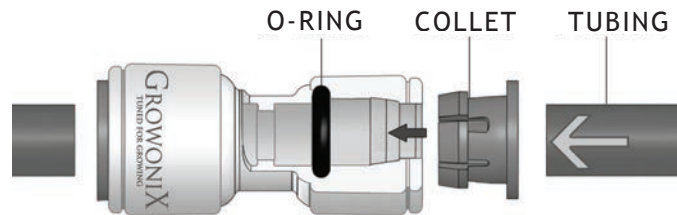


INSERT TUBE INTO FITTING

Push the tubing through the collet and dual o-rings until it bottoms out against the tube stop. The collet holds the tube in place and the dual o-rings provide a leak resistant seal.

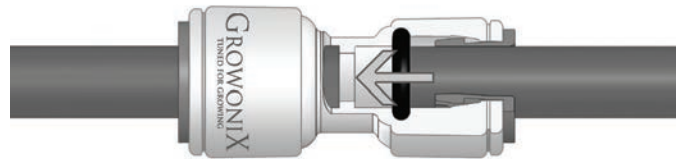

TEST AND INSPECT


Push and pull the tubing toward and away from the fitting to ensure that it has been installed properly. Test and inspect the installation for any leaks.

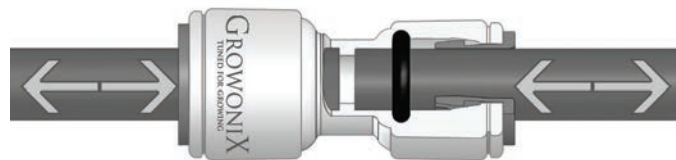

TUBE REMOVAL

Relieve pressure from the tubing and fitting. Push uniformly around the collet flange against the fitting body while pulling the tubing away from the fitting to release it.


PUSH COLLET IN

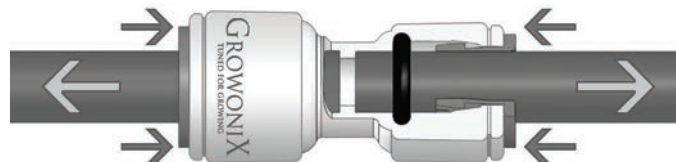


PULL TUBE OUT

FLOW RATES

100GPD – 400GPD FILTER FLOW RATES

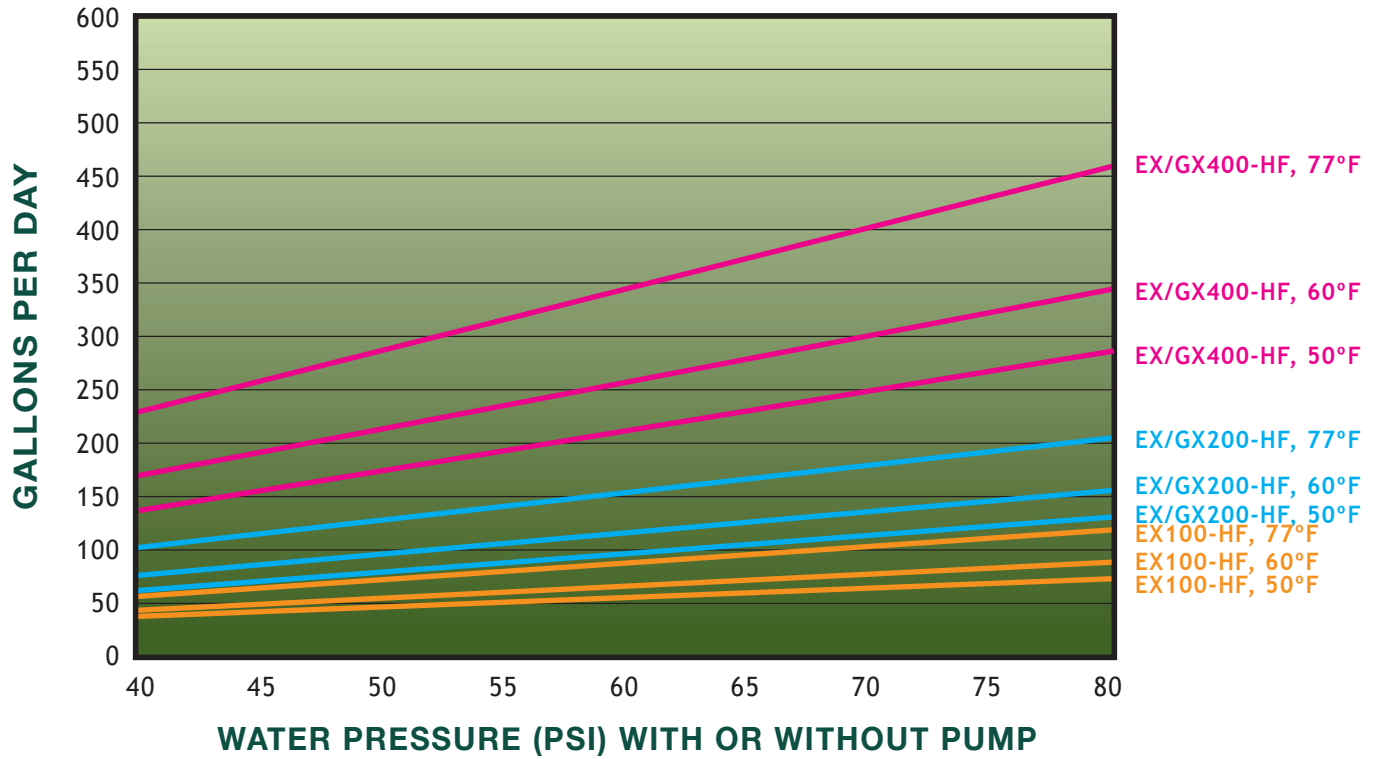

600GPD – 1000GPD FILTER FLOW RATES

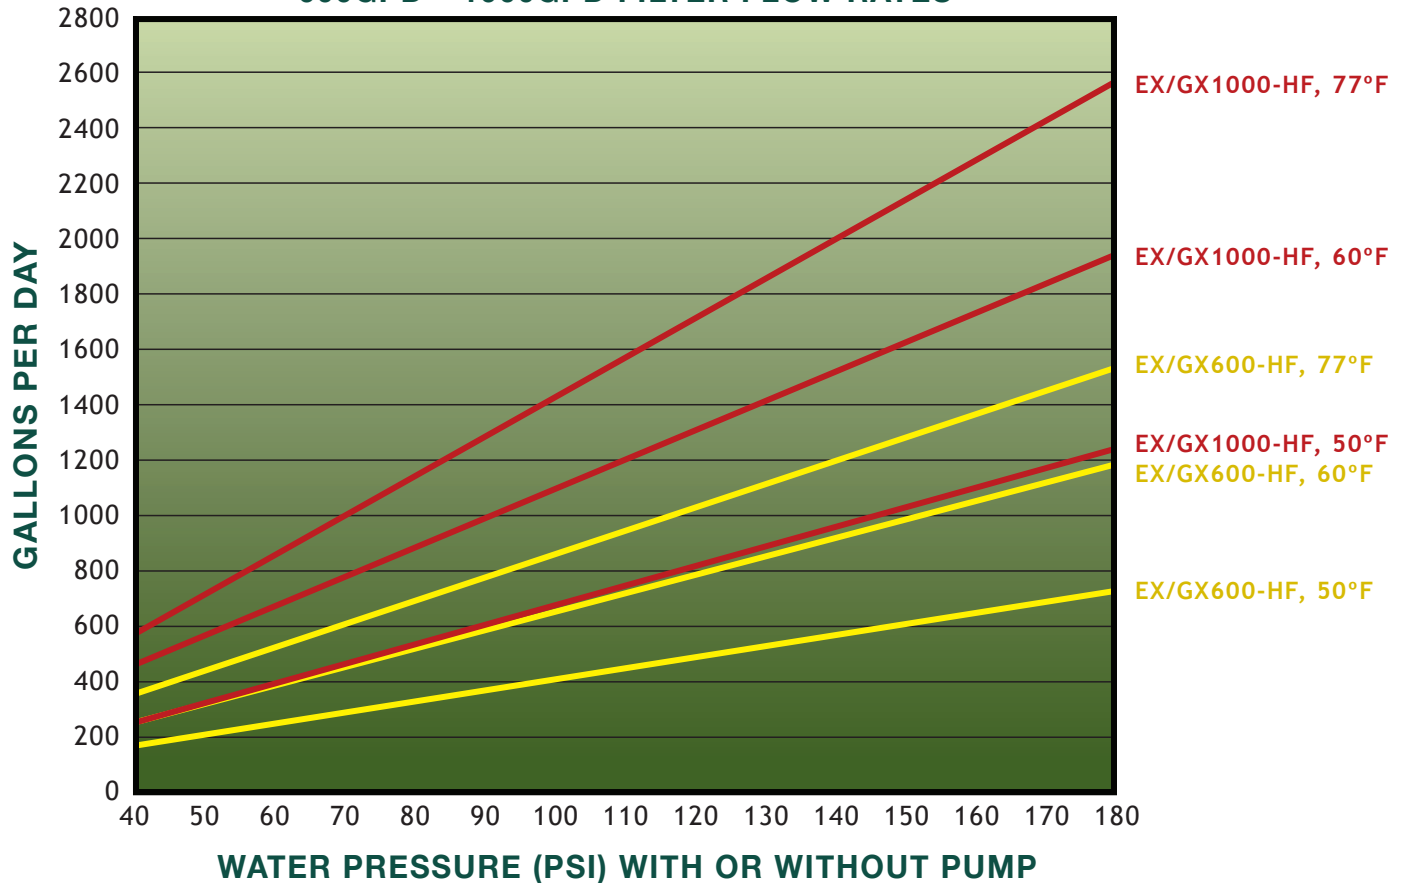

REPLACEMENT PARTS

MEMBRANE INDEX

-  **COCONUT CARBON FILTER— “GREEN BLOCK”**
PREMIUM COCO CARBON, PRODUCED USING ECO-FRIENDLY LOW EMISSIONS PROCESSES
-  **COCONUT CARBON FILTER— “WHITE BLOCK”**
ECONOMY COCO CARBON, SAME PERFORMANCE AS GREEN BLOCK, FOR A LITTLE LESS MONEY.
-  **KDF85/CATALYTIC ACTIVATED CARBON FILTER**
PREMIUM CARBON FILTER USING THE BEST ACTIVATED CARBON WITH A BED OF KDF85 MEDIA. THERE'S NO BETTER CARBON AVAILABLE.
-  **SEDIMENT SPUN**
SPUN POLY SEDIMENT FILTERS WITH HUGE DIRT HOLDING CAPACITY.
-  **SEDIMENT PLEATED**
HIGH FLOW SEDIMENT FILTERS WITH ULTRA LOW PRESSURE DROP.
-  **GXM INDUSTRIAL MEMBRANES**
HIGHEST FLOWING DOW SHEET MEMBRANES ON THE PLANET, WITH THE LOWEST WASTE RATIO.
-  **GXM HIGH FLOW COLD WATER MEMBRANES**
HIGHEST FLOWING RESIDENTIAL SIZED MEMBRANES. ALWAYS 2:1 RATIO.
-  **ALKALINE INLINE**
INLINE FILTER ADDS CALCIUM & MAGNESIUM TO FILTERED WATER, RAISES THE PH.
-  **ALKALINE CARTRIDGE**
CARTRIDGE ADDS CALCIUM & MAGNESIUM TO FILTERED WATER, RAISES THE PH.
-  **REMINERALIZING INLINE**
INLINE FILTER ADDS CALCIUM & MAGNESIUM TO FILTERED WATER,
-  **REMINERALIZING CARTRIDGE**
CARTRIDGE ADDS CALCIUM & MAGNESIUM TO FILTERED WATER,
-  **UV STERILIZATION**
KILLS 99.9% BACTERIA AND VIRUSES.
-  **DI INLINE**
DE-IONIZATION FILTER REMOVES LAST BIT OF PPM.

NEW GXM-600 & 1000 MEMBRANES!

30% INCREASED FLOW RATE

98.5% REJECTION

1:1
RATIO



GXM-1000HF 1000GPD@60PSI · 2400 GPD@180 PSI

GXM-600HF 600GPD@60PSI · 1400 GPD@180 PSI

FLOW RATED AT 65°F WATER TEMPERATURE


PRODUCT	TYPE	MSRP	SYSTEM	NOTES
---------	------	------	--------	-------

SPECIALTY FILTRATION, ACCESSORIES & REPLACEMENTS				
ALK-Inline	Alkaline	99.00	All RO systems	Raises ph, adds cal/mag mineral.
ALK-Cart	Alkaline	99.00	All RO systems	Raises ph, adds cal/mag mineral.
RM-Inline	Re-Mineralize	67.00	All RO systems	Adds cal/mag minerals.
RM-CART	Re-Mineralize	67.00	All RO systems	Adds cal/mag minerals.
DI-Inline	De-Ionization	31.00	All RO systems	Removes remaining TDS after RO (aquarium, lab)
DI-Cart	De-Ionization	34.00	All RO systems	Removes remaining TDS after RO (aquarium, lab)
UV-1530	Ultraviolet	149.00	All RO, Scrubber systems, tank storage	Kills 99.9% bacteria
UV-6010	Ultraviolet	215.00	All RO, Scrubber systems, tank storage	Kills 99.9% bacteria / viruses
UV-LB	Ultraviolet	443.00	All RO, Scrubber systems, tank storage	Kills 99.9% bacteria / viruses
UV-XL	Ultraviolet	538.00	All RO, Scrubber systems, tank storage	Kills 99.9% bacteria / viruses

PRODUCT	TYPE	APPLICATION / SYSTEM	MSRP	CAPACITY	NOTES
REPLACEMENTS FOR ALL WATER FILTERS 400 GPD AND UNDER					
SF-2510-PL	Sediment Pleated	EX100/200/400/400-Tall, GX200/300/400, Mini Scrub	14.50	Depends on feed water piping/supply	Stock on GX Series
SF-2510-SP	Sediment Spun	EX100/200/400/400-Tall, GX200/300/400, Mini Scrub	10.75	Depends on feed water piping/supply	Stock on EX Series
CF-2510-CC	Economy Coco Carbon	EX100/200/400/400-Tall, GX200/300/400, Mini Scrub	12.00	7,500 Gallons Total 2,500 Gallons RO Water	Stock on EX Series
CF-2510-GB	Green Carbon	EX100/200/400/400-Tall, GX200/300/400, Mini Scrub	16.50	7,500 Gallons Total 2,500 Gallons RO Water,	Stock on GX Series
CF-2510-KDF	Premium Carbon	EX100/200/400/400-Tall, GX200/300/400, Mini Scrub	39.00	8,000 Gallons Total 2,700 Gallons RO Water	Must for well water and chloramine removal
GXM-100	Standard Membrane	100+ GPD membrane for EX100	83.00	Depends on feed water quality	Fits most other RO systems
GXM-200-HF	High Flow Cold Water Membrane	200+ GPD High Flow Cold Water Membrane for EX100/200/400/400-Tall, GX200/300/400	99.00	Depends on feed water quality	Fits most other RO systems
BP-1530	Booster Pump	Booster pump for all RO systems 600 GPD and under.	227.00	12,000 Hrs brush life	Booster pump for all RO systems 600 GPD and under


REPLACEMENTS FOR EX400HF-TALL AND SLIMSCRUB					
SF-2520-SP	Sediment Spun	EX400-tall, Slim Scrub	10.75	Depends on feed water piping/supply	
CF-2520-CC	Economy Coco Carbon	EX400-tall, Slim Scrub	24.00	16,000 Gallons Total 5,300 Gallons RO Water	
CF-2520-KDF	Premium Carbon	EX400-tall, Slim Scrub	71.00	17,000 Gallons Total 5,700 Gallons RO Water	Must for well water and chloramine removal
CF-4520-KDF	Premium Carbon	EX600/1000-Tall, XL Scrub	127.00	34,000 Gallons Total 17,000 Gallons RO	Must for well water and chloramine removal

BP6010 DELIVERY PUMP COMPONENT DIAGRAM

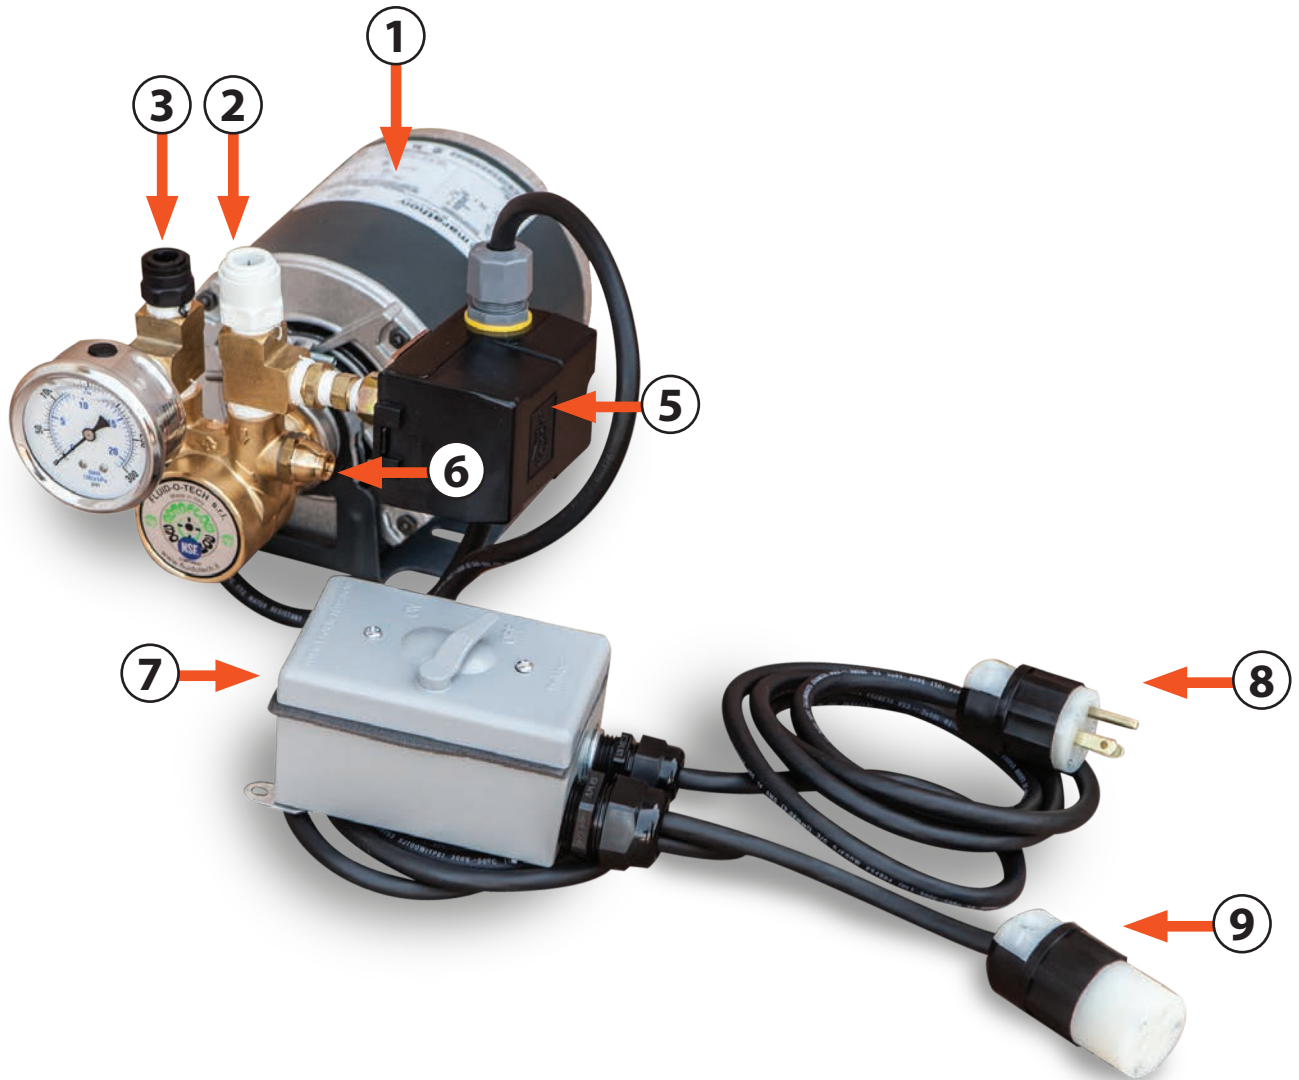

1. **MOTOR**
2. **PUMP INLET (CONNECT TO PRE FILTER HOUSING OUTPUT)**
3. **PUMP OUTLET (CONNECT TO MEMBRANE INPUT)**
4. **OUTLET PRESSURE GAUGE**
5. **LOW PRESSURE SWITCH**
6. **PUMP ADJUSTMENT**
7. **PUMP POWER ON/OFF SWITCH**
8. **AC IN CORD**
9. **PIGGYBACK CORD FOR SOLENOID VALVE (OPTIONAL)**


BP6010 CH DELIVERY PUMP COMPONENT DIAGRAM

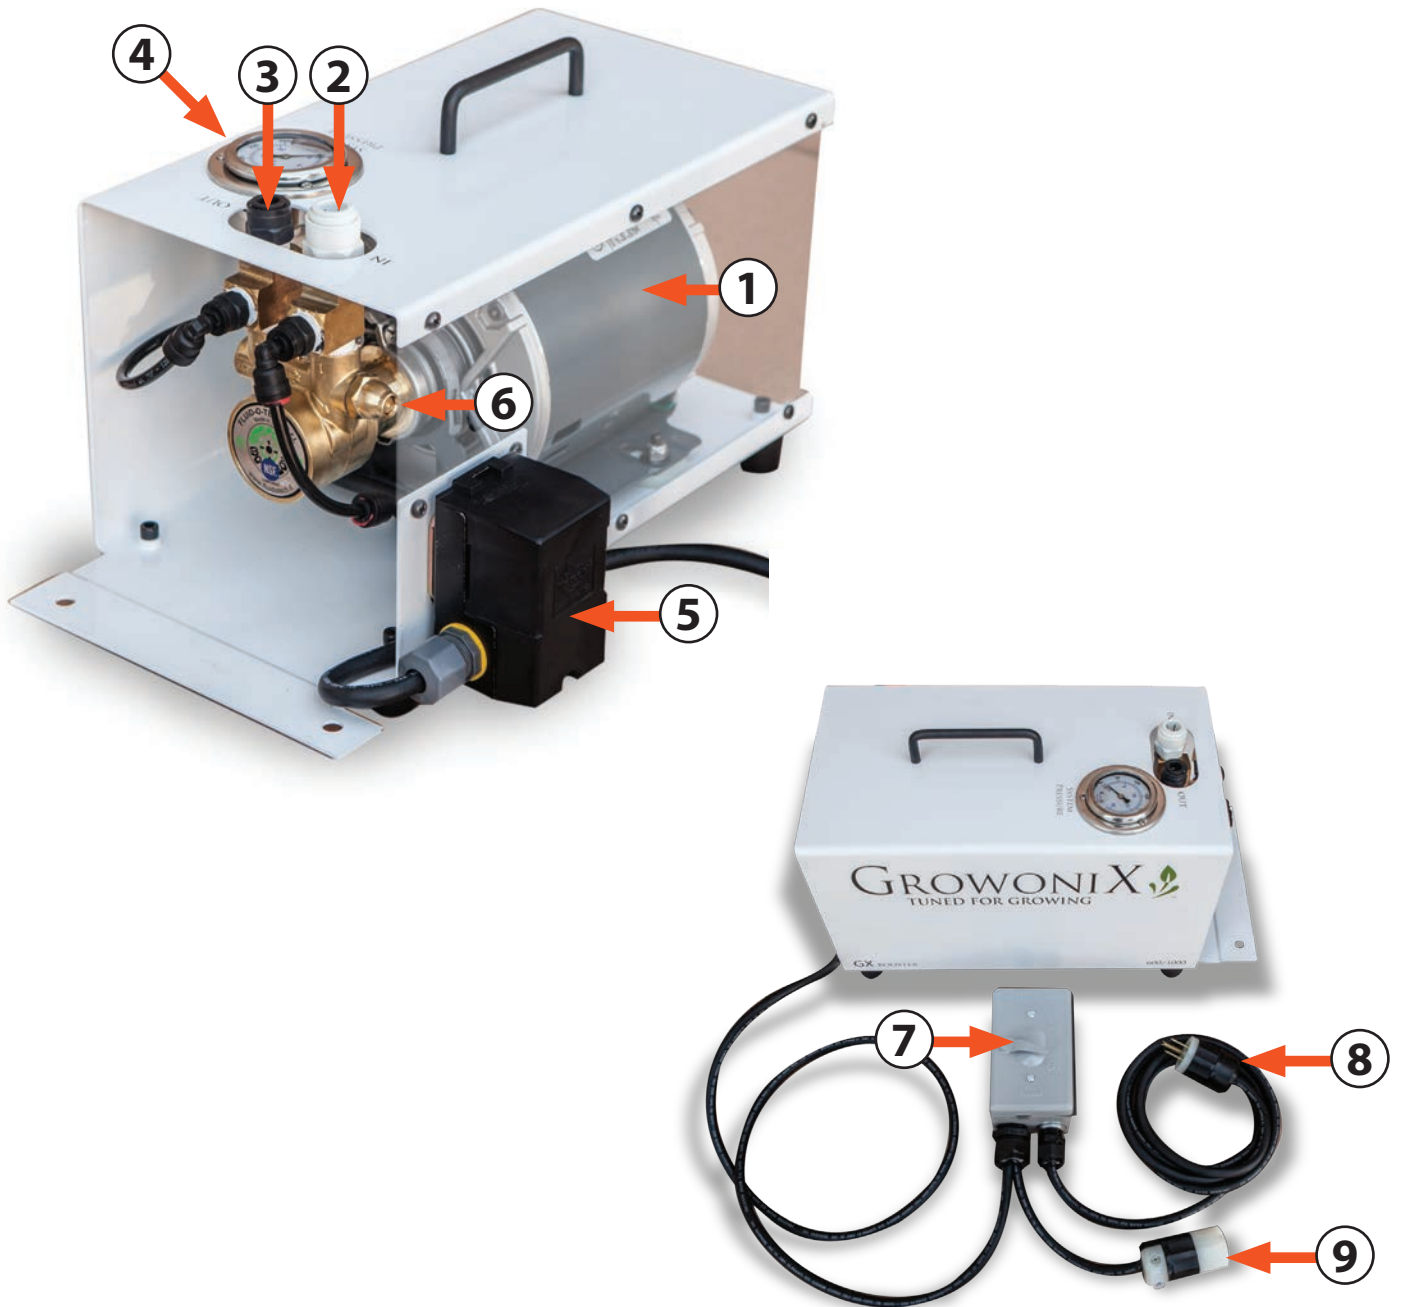

1. **MOTOR**
2. **PUMP INLET (CONNECT TO PRE FILTER HOUSING OUTPUT)**
3. **PUMP OUTLET (CONNECT TO MEMBRANE INPUT)**
4. **OUTLET PRESSURE GAUGE**
5. **LOW PRESSURE SWITCH**
6. **PUMP ADJUSTMENT**
7. **PUMP POWER ON/OFF SWITCH**
8. **AC IN CORD**
9. **PIGGYBACK CORD FOR SOLENOID VALVE (OPTIONAL)**

SETUP INSTRUCTIONS FOR EX

1

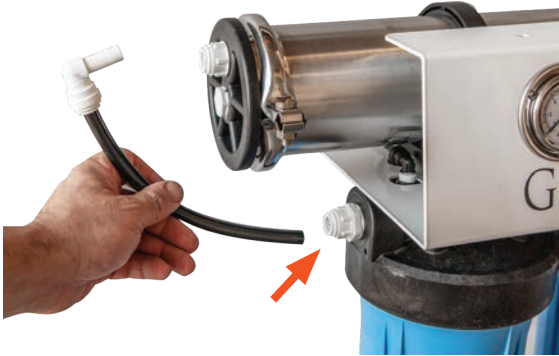

Slide locking clip off of carbon filter output fitting and remove the short length of 1/2" tubing feeding the membrane input.

2



Insert supplied 1/2" tubing into carbon filter output. Install locking clip.

3



Cut tubing to appropriate length (ensure no kinks or flow restrictions) and insert into the 1/2" pump input. Install locking clip.

4




Insert supplied 3/8" tubing into pump high pressure output. Install locking clip.

5




Cut tubing to appropriate length (ensure no kinks or flow restrictions) and install the 1/2" x 3/8" stem reducer onto tubing. Insert the stem reducer into the 1/2" membrane input fitting. Install locking clip.

6

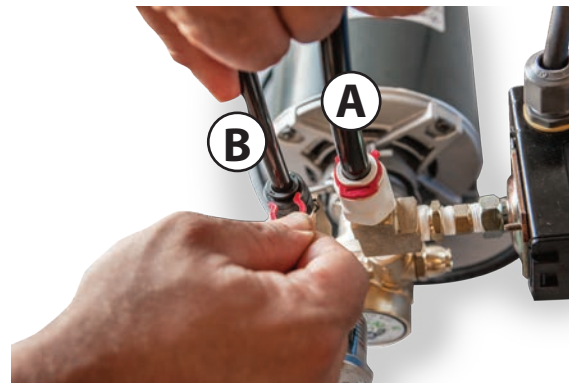

A) From output of carbon filter housing to pump input.
B) From high pressure pump output to input side of membrane housing.


7

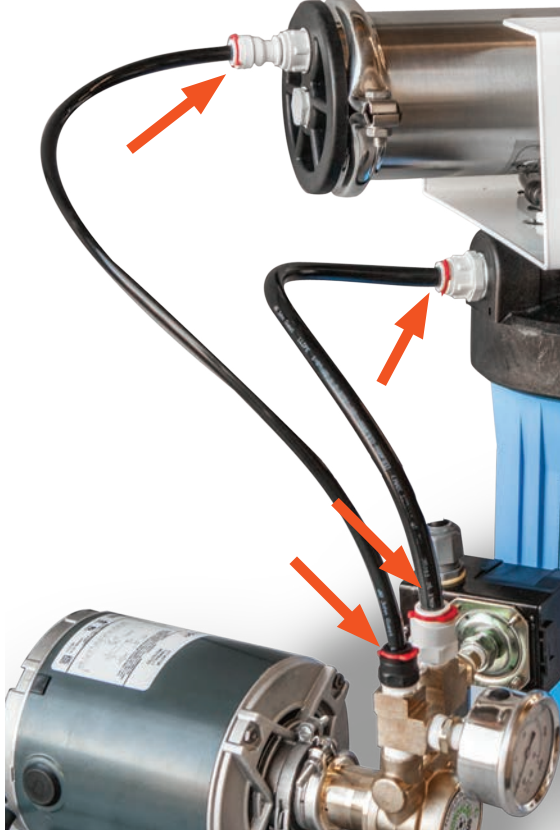

Reconnect all locking clips as shown

SETUP INSTRUCTIONS FOR GX

1

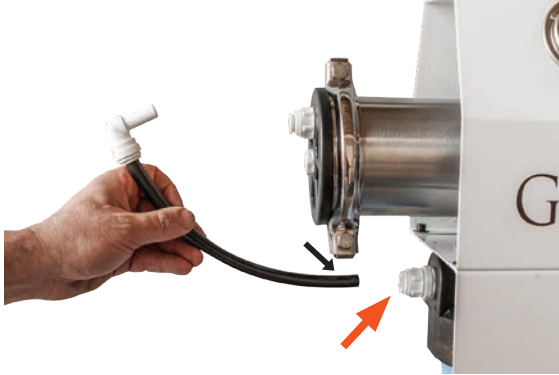

Slide locking clip off of carbon filter output fitting and remove the short length of 1/2" tubing feeding the membrane input.

2



Remove castor nut and washer

3



Attach BP-6010-CH chassis to GX600/1000 housing. Replace castor nut and washer and tighten.

4



Insert supplied 1/2" tubing into carbon filter output. Install locking clip.

5



Cut tubing to appropriate length (ensure no kinks or flow restrictions) and insert into the 1/2" pump input. Install locking clip.

6




Insert supplied 3/8" tubing into pump high pressure output. Install locking clip.

7



Cut tubing to appropriate length (ensure no kinks or flow restrictions) and install the 1/2" x 3/8" stem reducer onto tubing. Insert the stem reducer into the 1/2" membrane input fitting. Install locking clip.

8

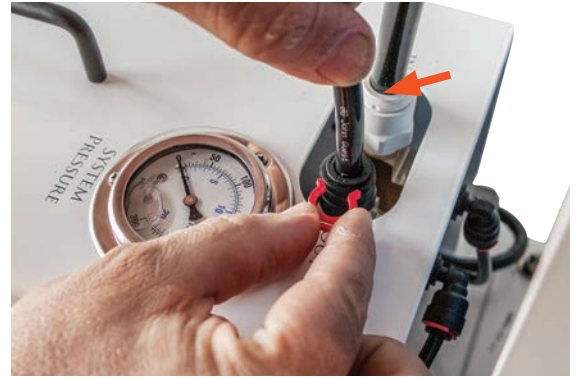

Slide locking clip off of prefilter output fitting.


9



Reconnect all locking clips as shown

PUMP TUNING

TUNING THE BP-6010 PUMP

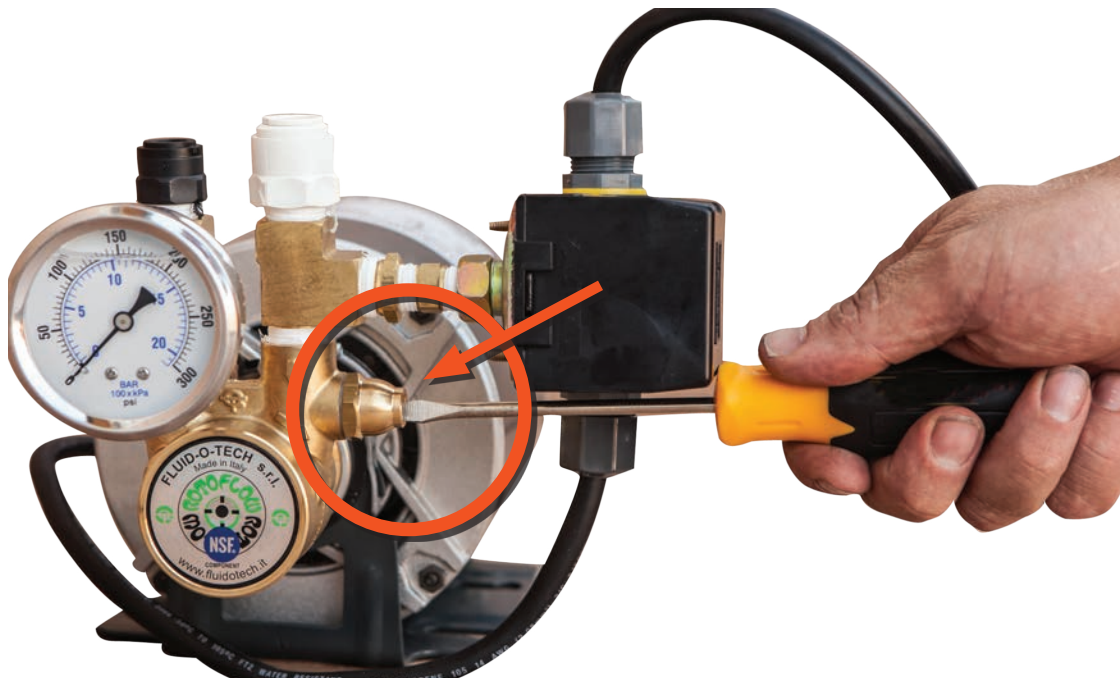

1. The bypass valve, located on the input side of the pump can be used to regulate pump output pressure. It is adjustable with a flat head screwdriver.
2. While referencing pump pressure gauge, turn screw clockwise to increase system pressure.
3. Turn screw counterclockwise to decrease system pressure.
4. Set system pressure at maximum 150 psi. Running the system at higher pressure could result in failure of fittings, and possible injury.

PUMP TUNING

TUNING THE BP-6010-CH PUMP



1. The bypass valve, located on the input side of the pump can be used to regulate pump output pressure. It is adjustable with a flat head screwdriver.

On the BP-6010-CH, an access hole located on the rear cover allows for pump adjustment. Depending on pump/motor combination, it may be necessary to remove access hole rubber grommet to allow more room for adjustment.


2. While referencing pump pressure gauge, turn screw clockwise to increase system pressure.
3. Turn screw counterclockwise to decrease system pressure.
4. Set system pressure at maximum 150 psi. Running the system at higher pressure could result in failure of fittings, and possible injury.

ELECTRIC SHUT OFF KIT COMPONENT DIAGRAM




1. SOLENOID VALVE
2. FLOAT SWITCH
3. FLOAT SWITCH PIGGYBACK CORD
4. SOLENOID VALVE MANUAL OVERRIDE SWITCH
5. SOLENOID VALVE DIRECTION OF FLOW

SOLENOID MANUAL OVERRIDE SWITCH

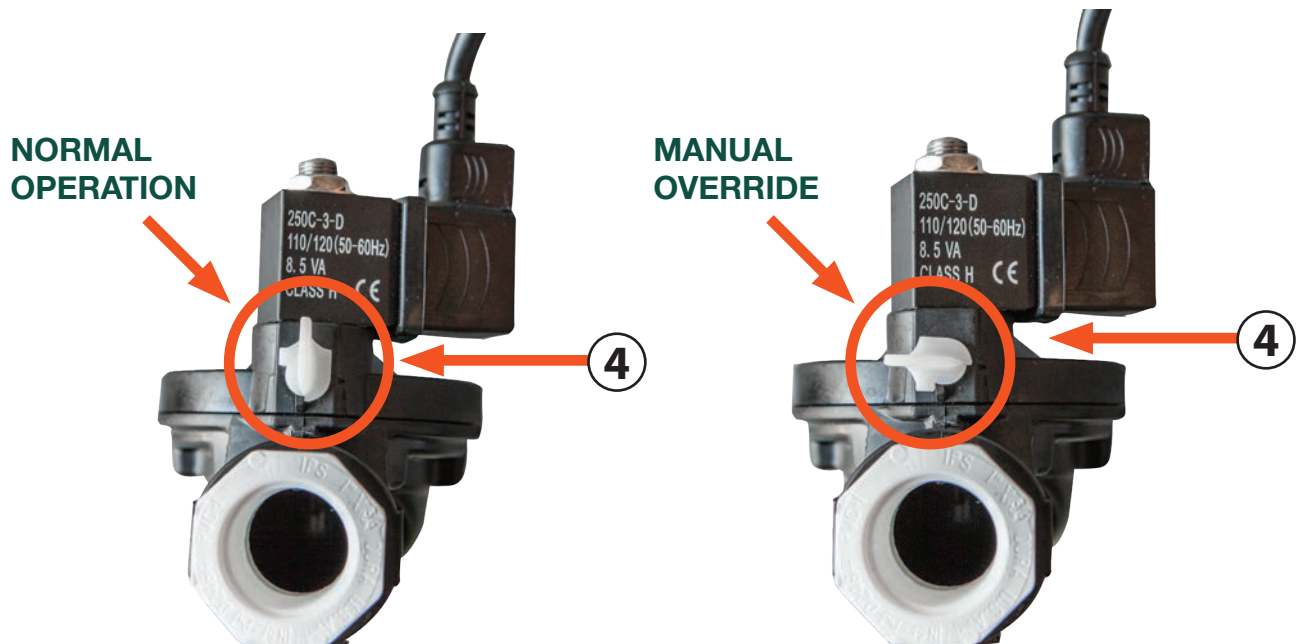

ELECTRIC SHUT OFF KIT CONNECTION

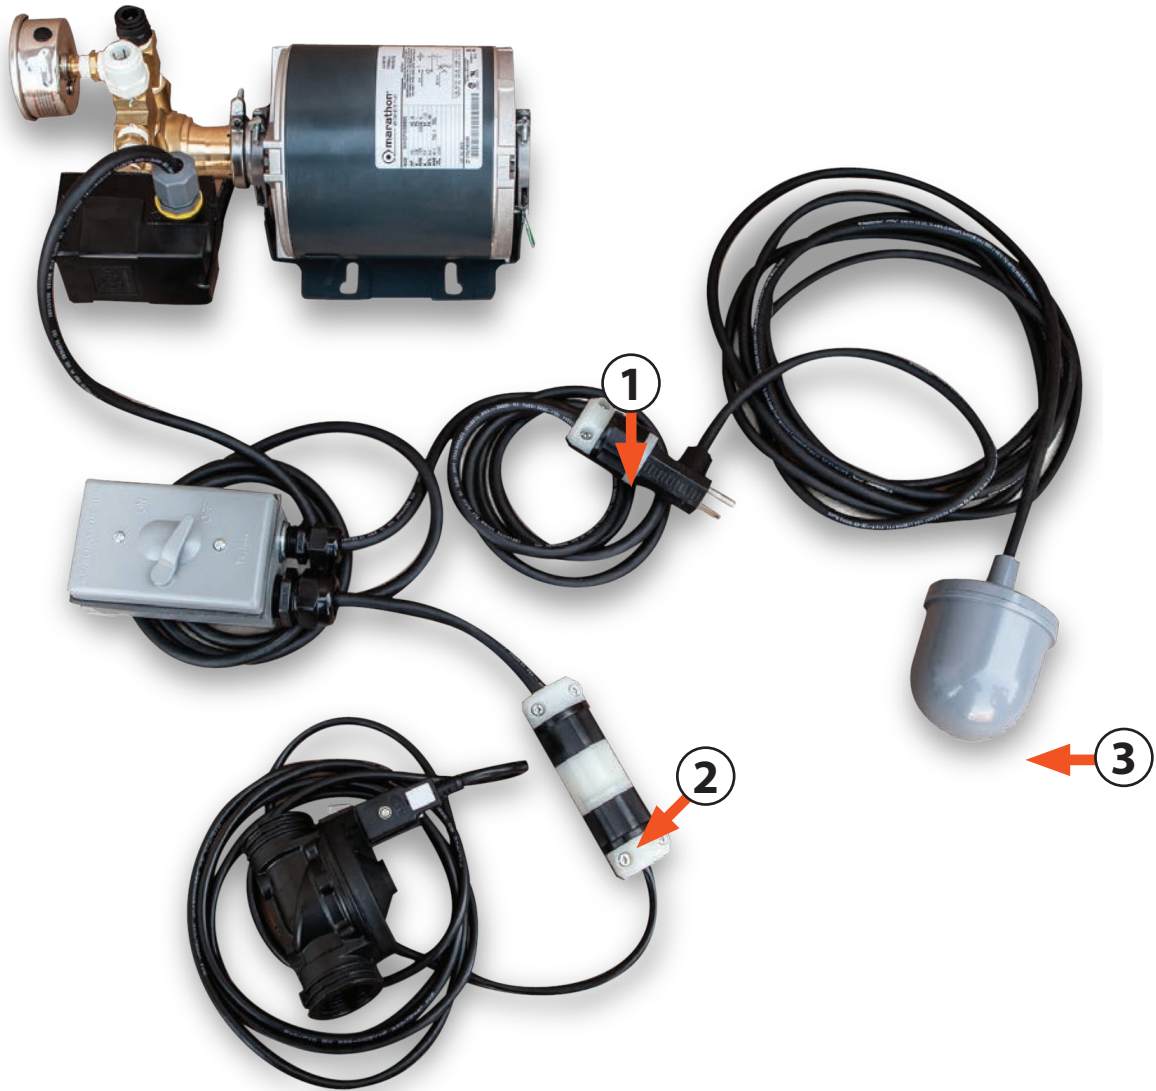

DISCONNECT PUMP AND ALL COMPONENTS FROM ELECTRICAL SUPPLY, AND TURN OFF FEED WATER SUPPLY BEFORE CONNECTING THE ESOK.

1. Install float switch in tank. (refer to page 21)
2. Attach float switch piggyback cord to male plug end from pump control box.
 - The float switch will now govern whether current will flow to the pump control box or not.
 - Float ball facing up=current does not flow (pump off).
 - Float ball facing downwards-current flows (pump on)
3. Plug solenoid valve into female plug end extending from pump control box (3).
 - When pump control switch is "ON", current will flow to the solenoid valve, and the valve will open.
 - If being used in conjunction with the float switch, current will not flow to pump control box or solenoid valve until float ball faces downward.

SOLENOID VALVE

4. Install solenoid valve on the input of the GX600/GX1000, making sure valve is installed in the correct direction of flow. (see arrow stamped on valve housing).
5. Make sure override switch is in the Normal Operation position (see: page 18).
6. Turn on feed water supply and check for leaks in solenoid water connections.
7. Turn on Booster Pump manually or with Float Switch.
8. Adjust output pressure (see page 16-17)

ELECTRIC SHUT OFF KIT CONNECTION



DISCONNECT PUMP AND ALL COMPONENTS FROM ELECTRICAL SUPPLY, AND TURN OFF FEED WATER SUPPLY BEFORE CONNECTING THE ESOK.

1. Install float switch in tank. (refer to page 21)
2. Attach float switch piggyback cord to male plug end from pump control box.
 - The float switch will now govern whether current will flow to the pump control box or not.
 - Float ball facing up=current does not flow (pump off).
 - Float ball facing downwards-current flows (pump on)
3. Plug solenoid valve into female plug end extending from pump control box (3).
 - When pump control switch is “ON”, current will flow to the solenoid valve, and the valve will open.
 - If being used in conjunction with the float switch, current will not flow to pump control box or solenoid valve until float ball faces downward.

SOLENOID VALVE

4. Install solenoid valve on the input of the GX600/GX1000, making sure valve is installed in the correct direction of flow. (see arrow stamped on valve housing).
5. Make sure override switch is in the Normal Operation position (see: page 18).
6. Turn on feed water supply and check for leaks in solenoid water connections.
7. Turn on Booster Pump manually or with Float Switch.
8. Adjust output pressure (see page 16-17)

SOLENOID PLUMBING CONNECTION



It's recommended to remove garden hose fittings from water filter input and attach supplied SCH80 PVC as shown below.



Solenoid installed on EX and GX Series Filter

IN-TANK FLOAT SWITCH INSTALLATION

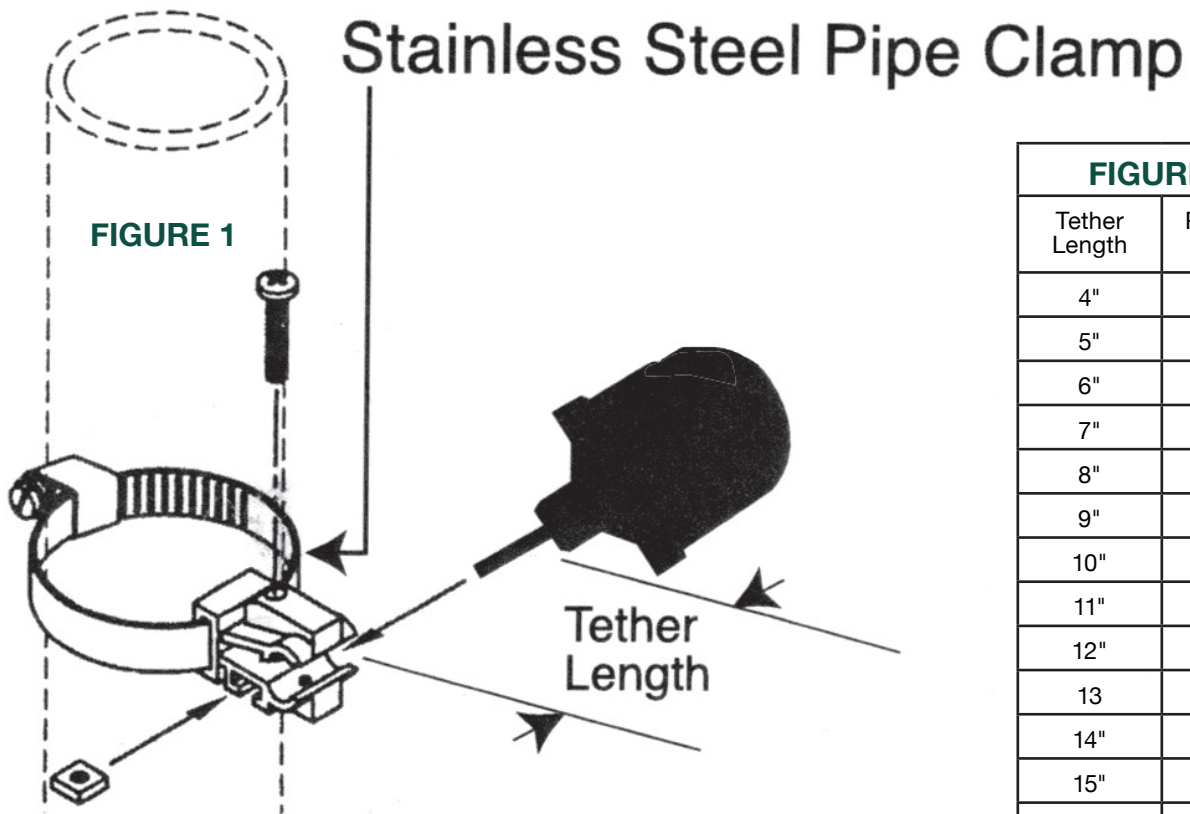


FIGURE 2

Tether Length	Pumping Range
4"	8"
5"	9"
6"	10"
7"	11"
8"	12"
9"	13"
10"	14"
11"	15"
12"	16"
13"	17"
14"	18"
15"	19"
16"	20"
17"	21"
18"	22"

NORMALLY CLOSED FLOAT SWITCHES ARE CLOSED WHILE HANGING "DOWN" AND WILL OPEN ON A RISING LIQUID LEVEL. TYPICALLY USED FOR "FILLING TANK" APPLICATIONS.

1. Determine desired cord tether length . See Figure 2.
2. Attach the Pipe Clamp at the desired location. See Figure 1.
Adjust the tether length to achieve the desired pumping range.
Use Figure 2 as a guide and test system by filling tank and cycling the system to achieve actual desired pumping range.
3. Tighten the clamp
4. Electrical outlet must not be located in pump chamber.
Electrical outlet voltage, piggyback plug voltage, and pump voltage must match.
5. Insert switch's piggyback plug into outlet.
6. Plug pump into piggyback plug and check the system by allowing the system to cycle to insure proper operation.

WARNING:

Turn off all power when installing or adjusting unit.
Failure to turn off all power could result in serious injury or death!
Warning: End user to provide overcurrent protection rated at 240VAC minimum, 15 Amps maximum.
Read instructions thoroughly. Check local codes and install to meet requirements.

GROWONIX GX 600/1000 ACCESORIES

ELECTRIC SHUT OFF KIT



An essential add-on to almost any water filter! Shuts down feed water before the water filter. Controls on/off cycling of high pressure booster pumps. The electric shutoff kit consists of a float switch and solenoid valve. Mount the float switch in your water tank or nutrient storage tank. Install the solenoid valve on the front end of your water filter. When the tank level decreases to the desired amount, the float switch opens the solenoid valve, the booster pump (if installed) powers on, and the water system begins refilling the storage tank.

DDP-6



The DDP-6 is the ultimate water delivery pump. With a flow rate of 6.5 GPM, the DDP-6 can move water from one end of the garden to the other in a flash. Integral as a feed pump and return pump for GrowoniX smaller nutrient top feed systems, the DDP-6 can withstand the most rigorous of duties. Built in high pressure cutoff allows for easy use with solenoid valves, manual shutoff valves, watering wands, hose sprayers, or faucets

BP-6010



DOUBLES pure water production for the EX600, EX1000, EX600, EX1000 water filters. The pump only needs 30psi of incoming water pressure to produce the full flow rate! Low pressure cutoff to safeguard the pump against a loss of incoming water pressure. Stainless steel liquid filled 300 psi system pressure gauge. Can be controlled manually or with our electric shutoff kit.

BP-6010-CH



DOUBLES pure water production for the GX600 and GX1000 water filters. Splash Guard™ chassis connects directly to the GX600/GX1000. The pump only needs 30psi of incoming water pressure to produce the full flow rate! Low pressure cutoff to safeguard the pump against a loss of incoming water pressure. Stainless steel liquid filled 300 psi system pressure gauge. Can be controlled manually or with our electric shutoff kit.

FLOW BOXES



GrowoniX FlowBox is a componential add-on to any GX600/1000 or EX600/1000 that utilizes a BP Series booster pump. Equipped with highly accurate liquid flow meters, the FlowBox allows for custom tuning and fine-tuning of the system ratio. Run your system at any ratio from 3:1 to 1:1— whenever you want. System ratios change throughout the year as the weather temperatures change. Keep a perfect 1:1 all year round with a FlowBox. Flush the system with a simple twist of the stainless steel needle valve. Allows for removal of the standard drain/flush assembly. Mounts atop the GX series chassis for easy viewing and adjusting. Easy wall mounting as well.

GXM INDUSTRIAL MEMBRANES



These Dow sheet, American made membranes are the industries most reliable and highest performing reverse osmosis elements in the world. Advanced membrane technology and manufacturing processes ensure superior quality and unmatched performance. Ultra low energy design delivers high flow and high rejection at only 80psi. A must for cold water sources. Always at an industry leading 1:1 ratio.

Flow Rate: 600 gpd high flow membrane
Membrane replacement for GX600, EX600, EX600-T


Flow Rate: 1000 gpd high flow membrane
Membrane replacement for GX1000 EX1000, EX1000-T

UV STERILIZATION



Stainless steel ultraviolet filtration to remove 99.9% of micro-organisms in your water supply. A must for well water treatment, whole house filter systems, or anytime water will be stored.

COCONUT CARBON / GREEN BLOCK



Green Coco: NFS61 Listed Greencarbon. High flow with a low carbon footprint. Superior chlorine removal..


SEDIMENT SPUN



Spun polypropylene: A true multi-staged depth filter utilizing separate layers of micron filtration. Constructed spun polypropylene, these filters offer superior dirt holding capacity at an extremely economic price. Great filter for changing frequently, especially in well water applications, or with use in GrowoniX scrubbers.

4.5"x9.75" Spun | 16000 gallons

SEDIMENT PLEATED



High flow pleated Sediment filter: This is a washable, reusable, and durable sediment filter with very low pressure drop. Bacteria and chemical resistant. Great for high flow applications and extended time between filter changes. Comes standard in most GrowoniX water filters.

4.5"x9.75" | 16000 gallons

KDF85/CATALYTIC CARBON FILTER



KDF/CAT. Bacteriostatic media controls growth of microorganisms. Good for water soluble metals removal, chlorine, chloramine, and scale. Highly reactive catalytic carbon, extremely porous and long lasting.

4.5"x9.75" | 16000 gallons

GROWONIX REVERSE OSMOSIS SYSTEM WARRANTY

For a period of one year from the date of original purchase, we will replace or repair any part of the GrowoniX reverse osmosis water system that we find to be defective in operation due to faulty materials or workmanship with the EXception of the replaceable filters and membranes.

GENERAL CONDITIONS

Damage to any part of this reverse osmosis system because of misuse; misapplication; negligence; alteration; accident; installation; or operation contrary to our instructions, incompatibility with accessories not installed by GrowoniX, or damage caused by freezing, flood, fire, or Act of God, is not covered by this warranty. In all such cases, regular charges will apply. This limited warranty does not include service to diagnose a claimed malfunction in this unit. This warranty is void if the claimer is not the original purchaser of the unit or if the unit is not operated under normal municipal water or well water conditions.

GrowoniX assumes no liability in connection with this reverse osmosis system. GrowoniX assumes no liability for any damages incurred through the use of this product. It is the responsibility of the end user to gauge the safe use of this product in the environment where it is applied. We do not authorize any person or representative to assume for us any other obligations on the sale of this reverse osmosis system. The information given out in the manual we believe to be true, but are offered to you in good faith without guarantee because each application of this product is different and beyond our control.

THE FOLLOWING STANDARD OPERATING CONDITIONS FOR RESIDENTIAL/COMMERCIAL REVERSE OSMOSIS SYSTEMS MUST BE MET FOR WARRANTY TO BE VALID.

	Water Pressure	pH Range	Maximum TDS	Water Temp
Standard System	40-80 psi	2-11	2000 ppm	40-100 F

GROWONIX RETURN POLICY

MERCHANDISE RETURN DETAILS AND PROCEDURE:

If any merchandise was defective —we will refund the full purchase price upon receiving and reviewing the merchandise returned in undamaged condition.

RMA NUMBER:

You must first obtain a Return Merchandise Authorization (RMA) number from GrowoniX.com. Any products sent to GrowoniX without an RMA number will not receive a refund and may be returned to the sender at their expense.

All refund amounts will be based on the manufacturer's warranty and GrowoniX return policy. Refunds will be issued back using the payment method you used when you placed your order. Refunds take up to 3-5 business days to process once we receive the return.

PACKAGING:

Please kindly re-pack the product in its original box, or a box of equivalent strength. The unit should be packed in the same manner as it came to prevent damage in shipping. Please return everything that was in the original box, including any free items if applicable. Be sure to drain out all water from wet systems and parts and wrap them in plastic bags before packing.

RETURN TO:

We will provide you with an GrowoniX warehouse address for return merchandise when we issue the RMA number.